



LOAD BREAK SWITCHES 16-125 A TOGGLE SWITCHES, KUE SERIES

- Compact size
- DIN-rail mounting
- 3-pole
- Switch technology by means of silver contacts ensures safe and durable operation
- Available with adapter to connect the switch to a three-phase section rail. Three different connections heights (see next page for dimensions)
- Available with yellow front plate and red toggle: Add Y/R at the end of the product type when ordering

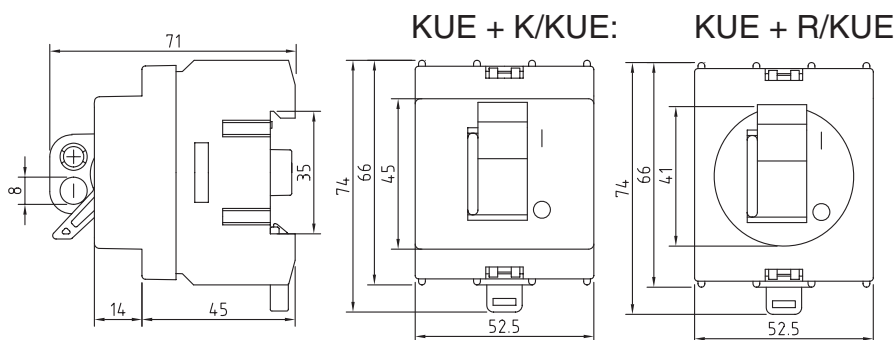


Type	400 V AC-21 415 V 690 V		400 V AC-22 415 V ¹⁾ 690 V ²⁾		400 V AC-23 415 V		AC-23 690 V		EAN-Code	Weight kg
	I _e / A	I _e / A	I _e / A	P / kW	I _e / A	P / kW				
KUE 316	25 A	16 A	16 A	7,5 kW	16 A	11 kW	6419410200308	0.17		
KUE 325	40 A	25 A	25 A	11 kW	20 A	15 kW	6419410200407	0.17		
KUE 340	63 A	40 A	25 A	11 kW	20 A	15 kW	6419410200506	0.17		
KUE 363	80 A	63 A	40 A	22 kW	32 A	30 kW	6419410200605	0.18		
KUE 380	100 A	80 A	63 A	30 kW	32 A	30 kW	6419410200704	0.18		
KUE 3125	125 A	125 ¹⁾ / 80 ²⁾ A	63 A	30 kW	32 A	30 kW	6419410200902	0.18		
KUE 316 + AD1 + K/KUE	25 A	16 A	16 A	7,5 kW	16 A	11 kW	6419410200322	0.21		
KUE 325 + AD1 + K/KUE	40 A	25 A	25 A	11 kW	20 A	15 kW	6419410200421	0.21		
KUE 340 + AD1 + K/KUE	63 A	40 A	25 A	11 kW	20 A	15 kW	6419410200520	0.21		
KUE 363 + AD1 + K/KUE	80 A	63 A	40 A	22 kW	32 A	30 kW	6419410200629	0.22		
KUE 380 + AD1 + K/KUE	100 A	80 A	63 A	30 kW	32 A	30 kW	6419410200728	0.22		
KUE 3125 + AD1 + K/KUE	125 A	125 ¹⁾ / 80 ²⁾ A	63 A	30 kW	32 A	30 kW	6419410200834	0.22		
KUE 316 + AD2 + K/KUE	25 A	16 A	16 A	7,5 kW	16 A	11 kW	6419410200339	0.21		
KUE 325 + AD2 + K/KUE	40 A	25 A	25 A	11 kW	20 A	15 kW	6419410200438	0.21		
KUE 340 + AD2 + K/KUE	63 A	40 A	25 A	11 kW	20 A	15 kW	6419410200537	0.21		
KUE 363 + AD2 + K/KUE	80 A	63 A	40 A	22 kW	32 A	30 kW	6419410200636	0.22		
KUE 380 + AD2 + K/KUE	100 A	80 A	63 A	30 kW	32 A	30 kW	6419410200735	0.22		
KUE 3125 + AD2 + K/KUE	125 A	125 ¹⁾ / 80 ²⁾ A	63 A	30 kW	32 A	30 kW	6419410200841	0.22		
KUE 316 + AD3 + K/KUE	25 A	16 A	16 A	7,5 kW	16 A	11 kW	6416410200346	0.21		
KUE 325 + AD3 + K/KUE	40 A	25 A	25 A	11 kW	20 A	15 kW	6419410200445	0.21		
KUE 340 + AD3 + K/KUE	63 A	40 A	25 A	11 kW	20 A	15 kW	6419410200810	0.21		
KUE 363 + AD3 + K/KUE	80 A	63 A	40 A	22 kW	32 A	30 kW	6419410200643	0.22		
KUE 380 + AD3 + K/KUE	100 A	80 A	63 A	30 kW	32 A	30 kW	6419410200827	0.22		
KUE 3125 + AD3 + K/KUE	125 A	125 ¹⁾ / 80 ²⁾ A	63 A	30 kW	32 A	30 kW	6419410200858	0.22		
ADDITIONAL FRONT PLATES										
K/KUE	Rectangular front plate							6419410221808	0.02	
R/KUE	Round front plate							6419410221907	0.02	
K/KUE AD	Long front plate							6419410221815	0.02	

TOGGLE SWITCHES, KUE SERIES ADAPTER DIMENSIONS

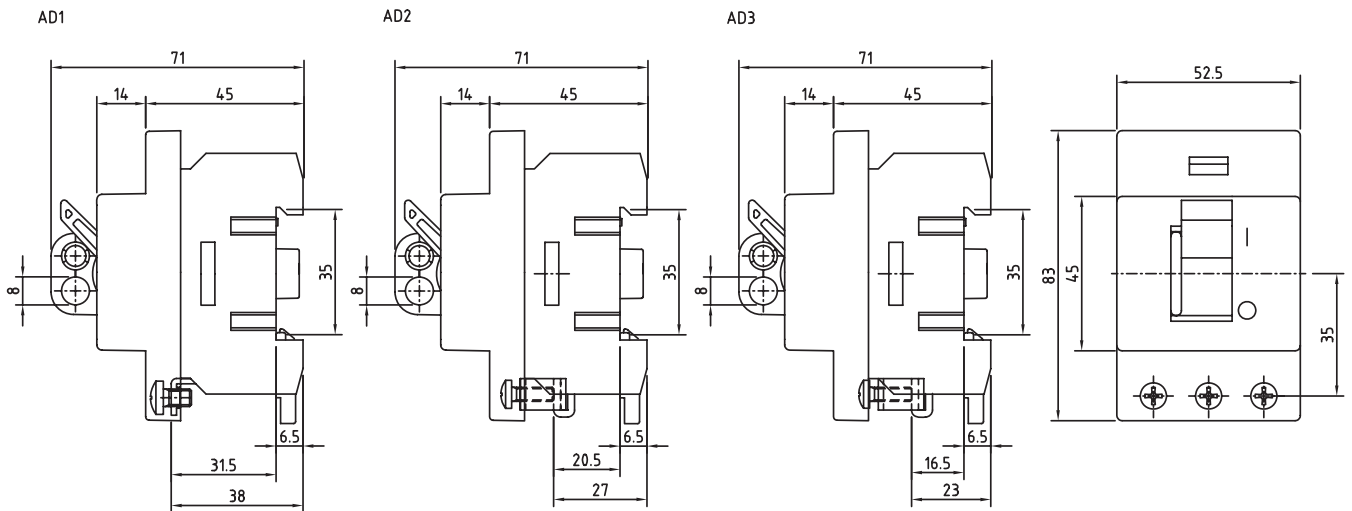

LOAD BREAK SWITCHES 125-160 A TOGGLE SWITCHES, EVA SERIES



- Compact size
- 3-pole
- Switch technology by means of silver contacts ensures safe and durable operation
- Includes front plate K/EVA
- Available with red toggle (R) or with yellow front plate and red toggle (Y/R)

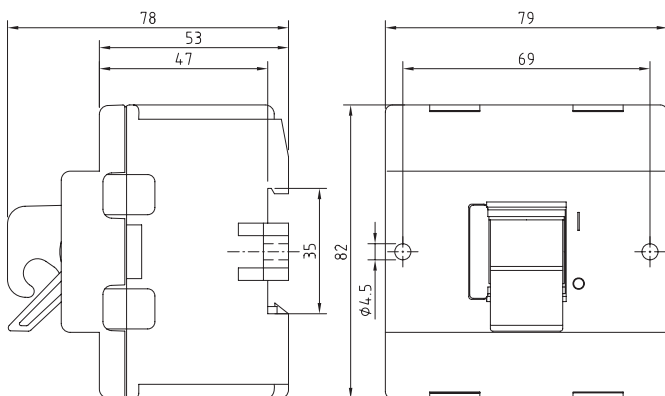


Type	400 V AC-21	400 V AC-22	400 V AC-23	400 V 415 V	AC-23	690 V	EAN-Code	Weight kg
	415 V 690 V	415 V 690 V						
	I_e / A	I_e / A	I_e / A	P / kW	I_e / A	P / kW		
EVA 3125+K/EVA	160 A	125 A	100 A	45 kW	80 A	55 kW	6419410202517	0.51
EVA 3160+K/EVA	200 A	160 A	125 A	75 kW	125 A	90 kW	6419410203019	0.51
EVA 3125+K/EVA R	160 A	125 A	100 A	45 kW	80 A	55 kW	6419410202524	0.51
EVA 3160+K/EVA R	200 A	160 A	125 A	75 kW	125 A	90 kW	6419410203026	0.51
EVA 3125+K/EVA Y/R	160 A	125 A	100 A	45 kW	80 A	55 kW	6419410202531	0.51
EVA 3160+K/EVA Y/R	200 A	160 A	125 A	75 kW	125 A	90 kW	6419410203033	0.51

LOAD BREAK SWITCHES 200-250 A TOGGLE SWITCHES, EVA SERIES


- Compact size
- 3-pole and 4-pole
- Switch technology by means of silver contacts ensures a long life expectancy and safe use in demanding conditions
- Available with terminal covers and phase barriers (LS/VS)
- Available with red toggle (R)

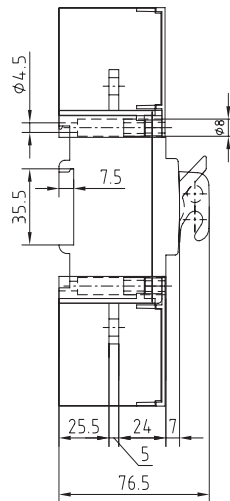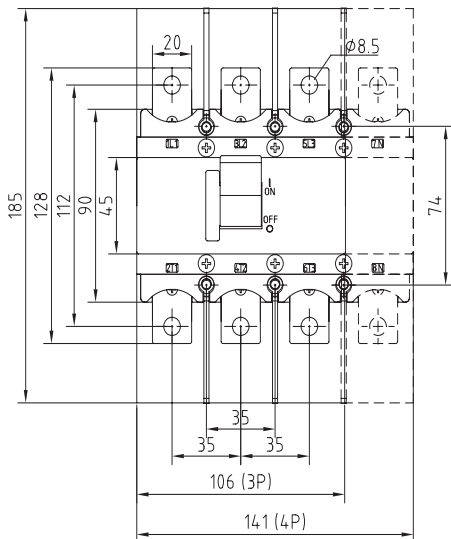

Terminal cover

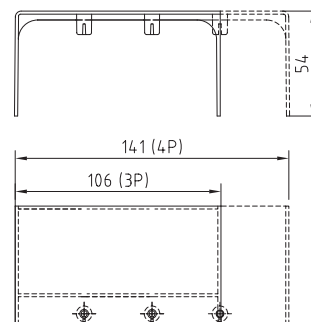

Phase barrier

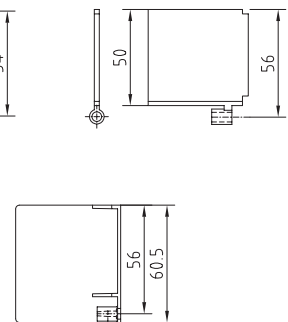

Type	AC-21	AC-22	AC-23	400 V 415 V P / kW	EAN-Code	Weight kg
	400 V 415 V I _e / A	400 V 415 V I _e / A	I _e / A			
3-pole						
EVA 3200	200 A	200 A	160 A	75 kW	6419410203156	0.9
EVA 3250	250 A	250 A	200 A	90 kW	6419410203200	0.9
EVA 3200 R	200 A	200 A	160 A	75 kW	6419410203163	0.9
EVA 3250 R	250 A	250 A	200 A	90 kW	6419410203217	0.9
EVA 3200 LS/VS	200 A	200 A	160 A	75 kW	6419410203170	0.9
EVA 3250 LS/VS	250 A	250 A	200 A	90 kW	6419410203224	0.9
EVA 3200 R LS/VS	200 A	200 A	160 A	75 kW	6419410203187	0.9
EVA 3250 R LS/VS	250 A	250 A	200 A	90 kW	6419410203321	0.9
4-pole						
EVA 4200	200 A	200 A	160 A	75 kW	6419410203262	1.1
EVA 4250	250 A	250 A	200 A	90 kW	6419410203309	1.1
EVA 4200 R	200 A	200 A	160 A	75 kW	6419410203279	1.1
EVA 4250 R	250 A	250 A	200 A	90 kW	6419410203316	1.1
EVA 4200 LS/VS	200 A	200 A	160 A	75 kW	6419410203286	1.2
EVA 4250 LS/VS	250 A	250 A	200 A	90 kW	6419410203323	1.2
EVA 4200 R LS/VS	200 A	200 A	160 A	75 kW	6419410203293	1.2
EVA 4250 R LS/VS	250 A	250 A	200 A	90 kW	6419410203330	1.2